

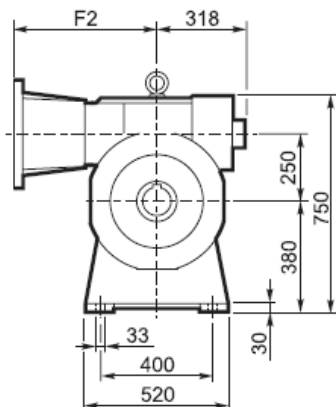
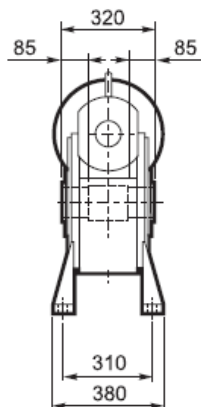


VF 250...P (IEC)


A

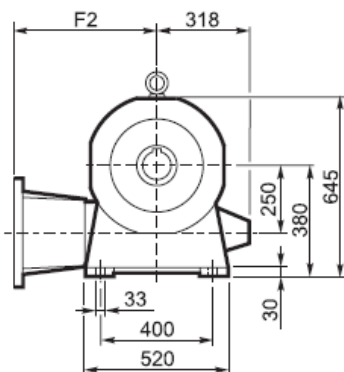


N

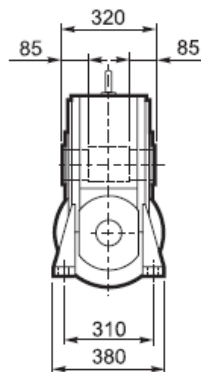

INPUT

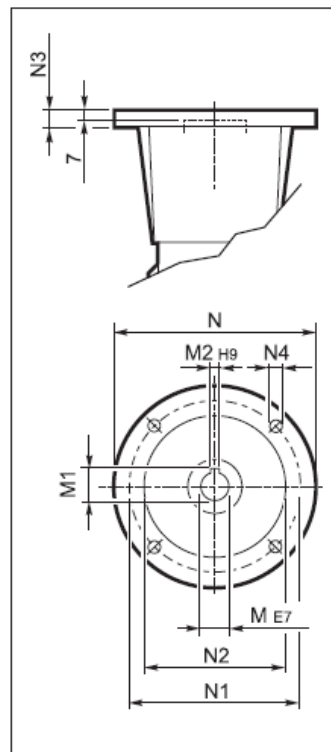


OUTPUT






VF 250...P (IEC)


V

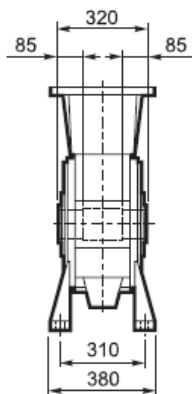


P

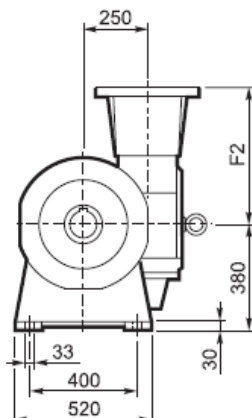

INPUT

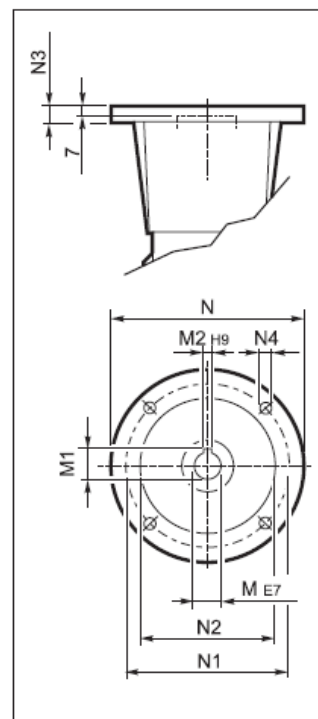

OUTPUT



Fan cooling as standard on versions A and P.

P(IEC) arrangements come complete with gear coupling enclosed in the bell housing.

		F2	M	M1	M2	N	N1	N2	N3	N4	
VF 250	P132 B5	531	38	41.3	10	300	265	230	25	M12	310
VF 250	P160 B5	506	42	45.3	12	350	300	250	22	18	
VF 250	P180 B5	506	48	51.8	14	350	300	250	22	18	
VF 250	P200 B5	531	55	59.3	16	400	350	300	25	M16	
VF 250	P225 B5	536	60	64.4	18	450	400	350	22	18#	

N° 8 holes at 45°