



Выходной вал и реактивная штанга червячных редукторов серии РС



Стандартный (одинарный) выходной вал

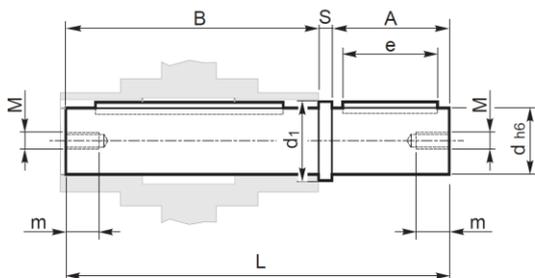

Двухсторонний выходной вал

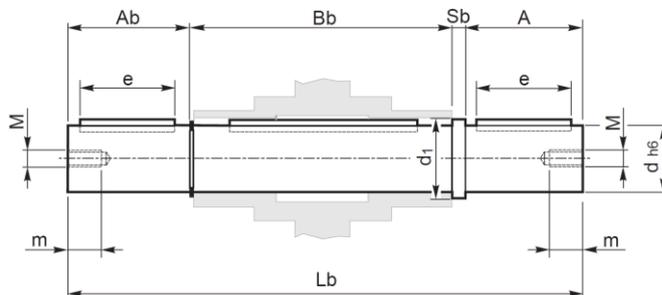

| PC | A | A _b | B | B _b | d (h6) | d1 | e | L | L _b | M | m | S | S _b |
|-----|----|----------------|-------|----------------|-----------|------|----|-------|----------------|-----|----|-----|----------------|
| 30 | 30 | 29 | 62.5 | 64.5 | 14 | 19.5 | 20 | 95 | 126 | M6 | 14 | 2.5 | 2.5 |
| 40 | 40 | 38.8 | 77 | 79.2 | 18 | 23.5 | 30 | 120 | 161 | M6 | 14 | 3 | 3 |
| 50 | 50 | 50 | 90 | 93.2 | 25 | 31.5 | 40 | 143.5 | 196.7 | M10 | 19 | 3.5 | 3.5 |
| 63 | 50 | 48.8 | 111 | 113.2 | 25 | 31.5 | 40 | 165 | 216 | M10 | 19 | 4 | 4 |
| 75 | 60 | 58.8 | 119 | 121.2 | 28 | 34.5 | 50 | 183 | 244 | M10 | 28 | 4 | 4 |
| 90 | 80 | 78.5 | 139 | 141.5 | 35 | 42.5 | 60 | 224 | 305 | M10 | 28 | 5 | 5 |
| 110 | 80 | 77.3 | 157.5 | 156.8 | 42 | 49.5 | 60 | 242.5 | 322 | M10 | 28 | 5 | 8 |

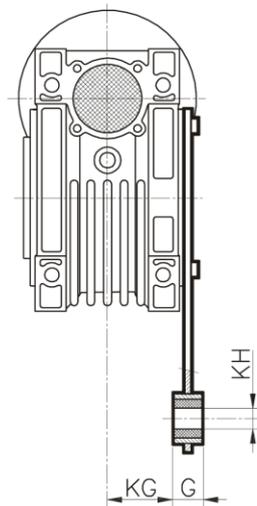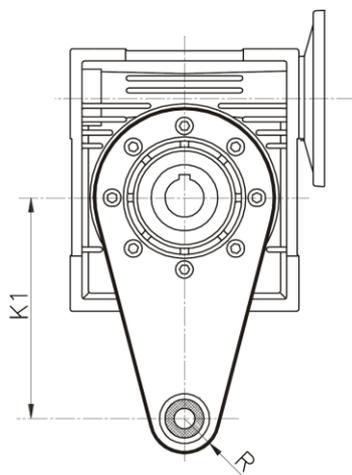

| | K1 | G | KG | KH | R |
|-----|-----|----|------|----|----|
| 030 | 85 | 14 | 24 | 8 | 15 |
| 040 | 100 | 14 | 31,5 | 10 | 18 |
| 050 | 100 | 14 | 38,5 | 10 | 18 |
| 063 | 150 | 14 | 49 | 10 | 18 |
| 075 | 200 | 25 | 47,5 | 20 | 30 |
| 090 | 200 | 25 | 57,5 | 20 | 30 |
| 110 | 250 | 30 | 62 | 25 | 35 |
| 130 | 250 | 30 | 69 | 25 | 35 |
| 150 | 250 | 30 | 84 | 25 | 35 |