



## Редуктор BONFIGLIOLI W 75

**W 75...P(IEC)**

**U**


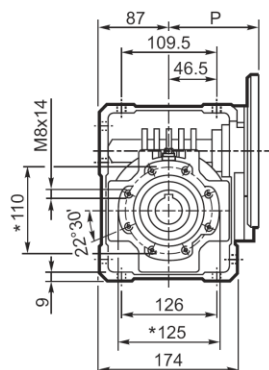


**UF**

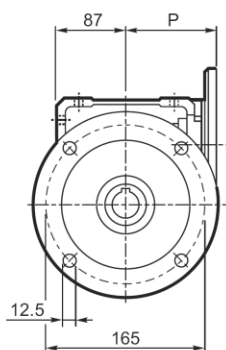


**UFC**

**UFCR\_#**

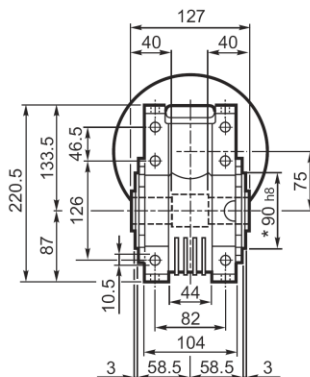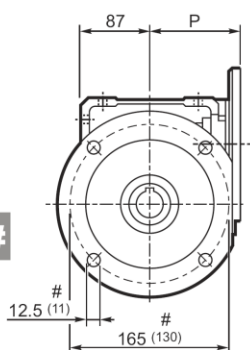


**UF1**

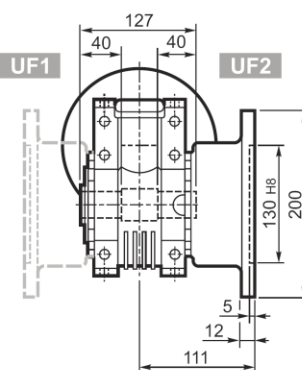


**UF2**

**UFC1**  
**UFCR1**

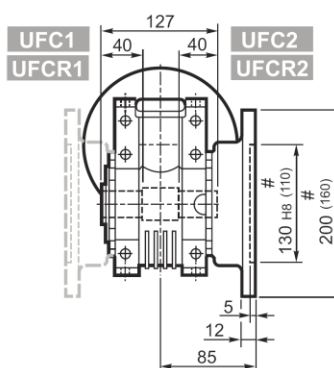


**UFC2**  
**UFCR2**


**INPUT**

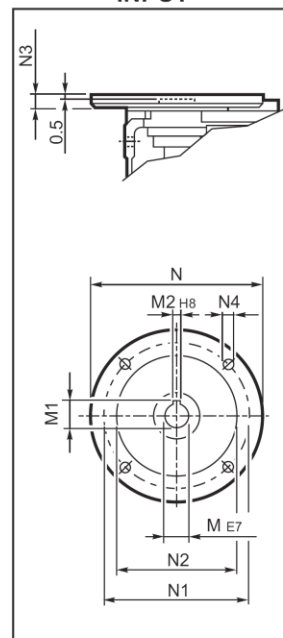

**STANDARD OUTPUT**



**ON REQUEST OUTPUT**



### W 75

|      |          | M  | M1   | M2 | N   | N1  | N2  | N3  | N4   | P   | $\frac{Q}{Kg}$ |
|------|----------|----|------|----|-----|-----|-----|-----|------|-----|----------------|
| W 75 | P71 B5   | 14 | 16.3 | 5  | 160 | 130 | 110 | 11  | 9    | 112 | 9.5            |
| W 75 | P80 B5   | 19 | 21.8 | 6  | 200 | 165 | 130 | 12  | 11.5 | 112 | 9.7            |
| W 75 | P90 B5   | 24 | 27.3 | 8  | 200 | 165 | 130 | 12  | 11.5 | 112 | 9.6            |
| W 75 | P100 B5  | 28 | 31.3 | 8  | 250 | 215 | 180 | 13  | 12.5 | 120 | 9.7            |
| W 75 | P112 B5  | 28 | 31.3 | 8  | 250 | 215 | 180 | 13  | 12.5 | 120 | 9.7            |
| W 75 | P80 B14  | 19 | 21.8 | 6  | 120 | 100 | 80  | 7.5 | 6.5  | 112 | 9.4            |
| W 75 | P90 B14  | 24 | 27.3 | 8  | 140 | 115 | 95  | 7.5 | 8.5  | 112 | 9.4            |
| W 75 | P100 B14 | 28 | 31.3 | 8  | 160 | 130 | 110 | 10  | 8.5  | 120 | 9.5            |
| W 75 | P112 B14 | 28 | 31.3 | 8  | 160 | 130 | 110 | 10  | 8.5  | 120 | 9.5            |