
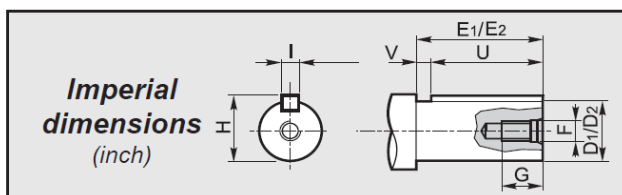


Редуктор, Мотор-редуктор RCV 202, 203 VARMEC

CV RCV	i	n ₁ = 2800 min ⁻¹			n ₁ = 1400 min ⁻¹			n ₁ = 900 min ⁻¹			 IEC B5 IEC B14 NEMA		
		n ₂ min ⁻¹	Mn ₂ Nm	P ₁ kW	n ₂ min ⁻¹	Mn ₂ Nm	P ₁ kW	n ₂ min ⁻¹	Mn ₂ Nm	P ₁ kW			
202	3.81	735	44	3.5	367	52	2.1	236	52	1.3	63-71-80-90	90	56-140
	4.66	601	51	3.3	300	61	2.0	193	61	1.3	63-71-80-90	90	56-140
	5.49	510	61	3.4	255	73	2.0	164	73	1.3	63-71-80-90	90	56-140
	6.46	433	59	2.8	217	70	1.7	139	70	1.1	63-71-80-90	90	56-140
	7.75	361	60	2.4	181	72	1.4	116	73	0.92	63-71-80-90	90	56-140
	8.57	327	61	2.2	163	73	1.3	105	73	0.84	63-71-80-90	90	56-140
	9.92	282	64	2.0	141	77	1.2	91	77	0.76	63-71-80-90	90	56-140
	11.67	240	65	1.7	120	78	1.0	77	78	0.66	63-71-80-90	90	56-140
	14.00	200	65	1.4	100	78	0.85	64	78	0.55	63-71-80-90	90	56-140
	15.48	181	65	1.3	90	78	0.77	58	78	0.49	63-71-80-90	90	56-140
	18.01	155	81	1.4	78	97	0.82	50	97	0.53	63-71-80-90	90	56-140
	21.19	132	80	1.2	66	96	0.69	42.5	96	0.44	63-71-80-90	90	56-140
	25.43	110	88	1.1	55	106	0.64	35.4	106	0.41	63-71-80-90	90	56-140
	28.13	100	86	0.93	50	103	0.56	32.0	103	0.36	63-71-80-90	90	56-140
	31.71	88	89	0.86	44.2	108	0.52	28.4	107	0.33	63-71-80-90	90	56-140
	37.31	75	90	0.74	37.5	107	0.44	24.1	107	0.28	63-71-80-90	90	56-140
	44.77	63	89	0.61	31.3	107	0.37	20.1	107	0.23	63-71-80-90	90	56-140
	49.52	57	87	0.54	28.3	104	0.32	18.2	104	0.21	63-71-80-90	90	56-140
	54.20	52	86	0.48	25.8	103	0.29	16.6	103	0.19	63-71-80-90	90	56-140
	60.43	46	75	0.38	23.2	90	0.23	14.9	90	0.15	63-71-80-90	90	56-140

203	58.10	48.2	89	0.48	24.1	107	0.29	15.5	107	0.19	56-63-71	56-63-71	56
	64.30	43.5	87	0.43	21.8	104	0.26	14.0	104	0.16	56-63-71	56-63-71	56
	69.20	40.5	91	0.41	20.2	109	0.25	13.0	108	0.16	56-63-71	56-63-71	56
	81.40	34.4	90	0.35	17.2	108	0.21	11.1	108	0.13	56-63-71	56-63-71	56
	97.70	28.7	90	0.29	14.3	107	0.17	9.2	108	0.11	56-63-71	56-63-71	56
	108.10	25.9	87	0.25	13.0	105	0.15	8.3	104	0.10	56-63-71	56-63-71	56
	120.10	23.3	91	0.24	11.7	109	0.14	7.5	109	0.09	56-63-71	56-63-71	56
	141.30	19.8	91	0.20	9.9	108	0.12	6.4	108	0.08	56-63-71	56-63-71	56
	169.50	16.5	91	0.17	8.3	108	0.10	5.3	108	0.06	56-63-71	56-63-71	56
	187.50	14.9	89	0.15	7.5	107	0.09	4.8	107	0.06	56-63-71	56-63-71	56

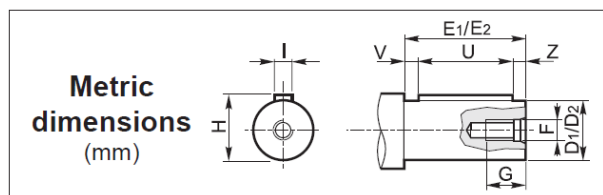


1 Albergo entrata / Input shaft / Antriebswelle Arbre d'entrée / Eje de entrada / Eixo de entrada									
CV	D ₁ h6	E ₁	F	G	H	I	U	V	Z
202	19	40	M6	15	21.5	6	30	5	5
203	16	40	M6	15	18	5	25	10	5


1 Albergo entrata / Input shaft / Antriebswelle Arbre d'entrée / Eje de entrada / Eixo de entrada									
CV	D ₁	E ₁	F	G	H	I	U	V	
202	0.750	1.575	5/16-18	0.709	0.832	0.187	1.000	0.575	
203	0.625	1.575	1/4-20	0.630	0.704	0.187	1.000	0.575	

2 Albergo uscita / Output shaft / Abtriebswelle Arbre de sortie / Eje de salida / Eixo de saída									
CV RCV	D ₂ h6	E ₂	F	G	H	I	U	V	Z
202 203	14	30	M5	12	16	5	20	5	5
	16	40	M6	16	18	5	30	5	5
	19	40	M6	16	21.5	6	30	5	5
	20	40	M8	18	22.5	6	30	5	5
	24	40	M8	18	27	8	30	5	5
	25	50	M8	18	28	8	40	5	5
	28	60	M8	18	31	8	50	5	5
	30	60	M10	22	33	8	50	5	5

2 Albergo uscita / Output shaft / Abtriebswelle Arbre de sortie / Eje de salida / Eixo de saída									
CV RCV	D ₂	E ₂	F	G	H	I	U	V	
202 203	0.750	1.575	5/16-18	0.709	0.832	0.187	1.000	0.575	



Редуктор, Мотор-редуктор RCV 202, 203 VARMEC

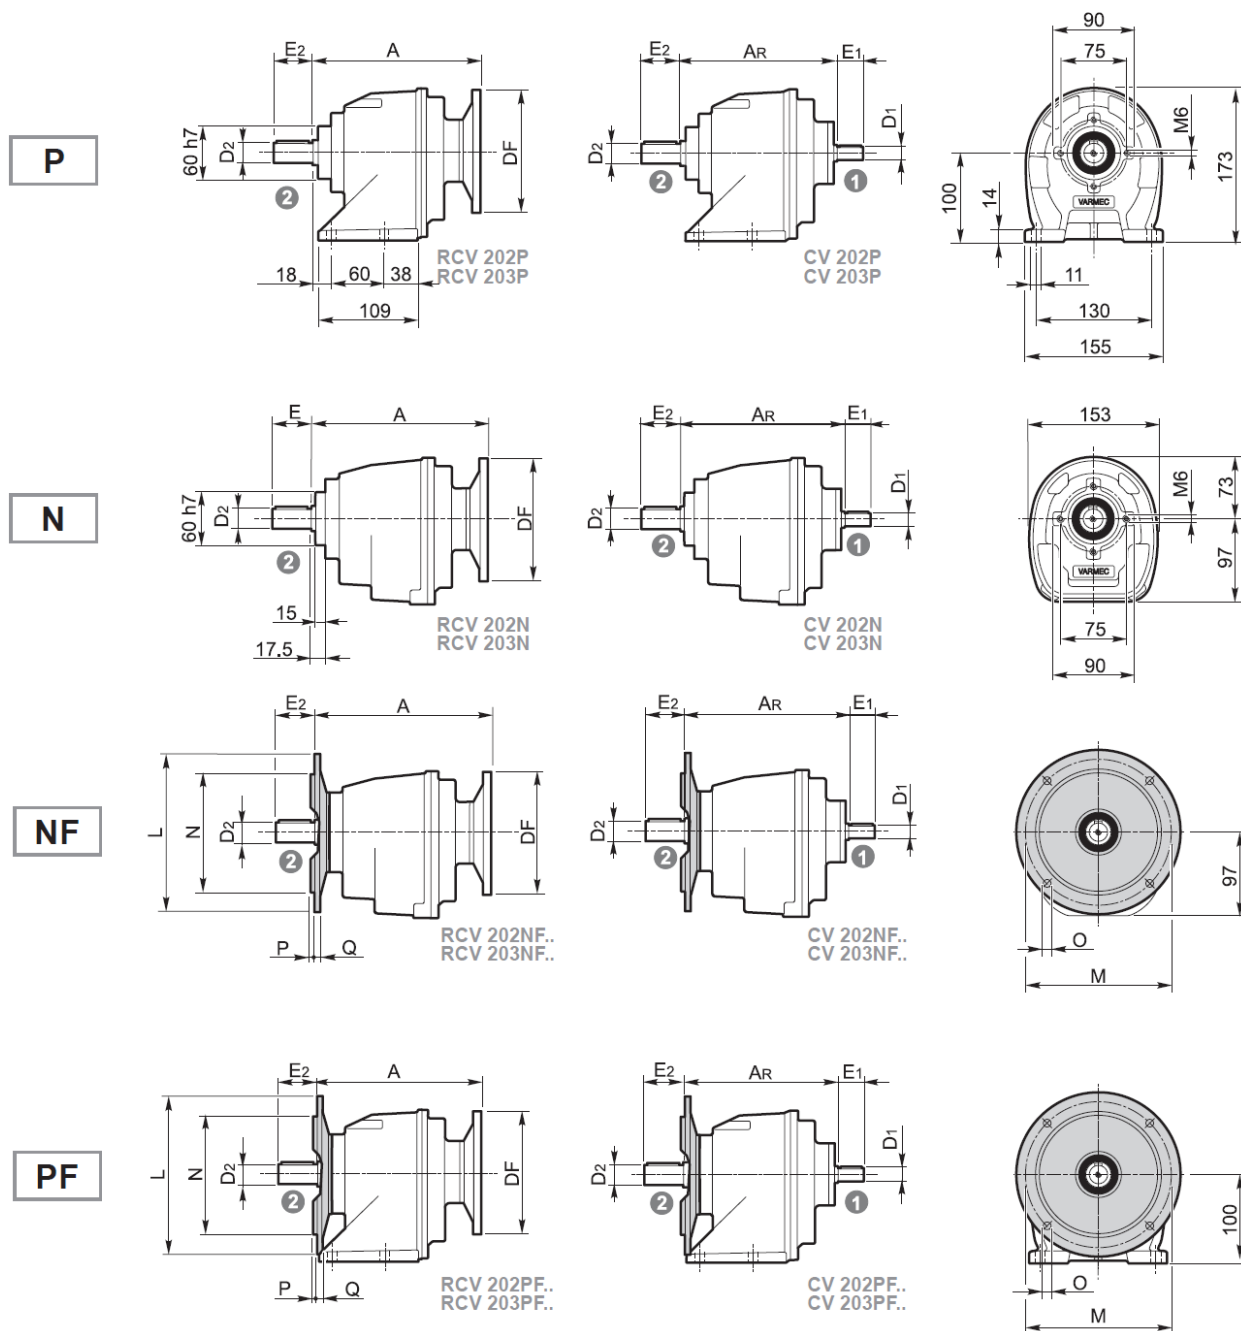

RCV CV	RCV						CV	
	IEC	DF		A	NEMA	DF	A	AR
		(B5)	(B14)					
202	63	140		180	56	165.1	188	173
	71	160			140	165.1	188	
	80	200						
	90	200			140			
203	56	120	80	173.2	56	165.1	192.2	170
	63	140	90					
	71	160	105					

	L	M	N h8	O	P	Q
NF120 - PF120	120	100	80	7	2.5	10
NF140 - PF140	140	115	95	9	3	10
NF160 - PF160	160	130	110	11	3	10
NF200	200	165	130	11	3	10